


TRAYS

Molds & draining trays

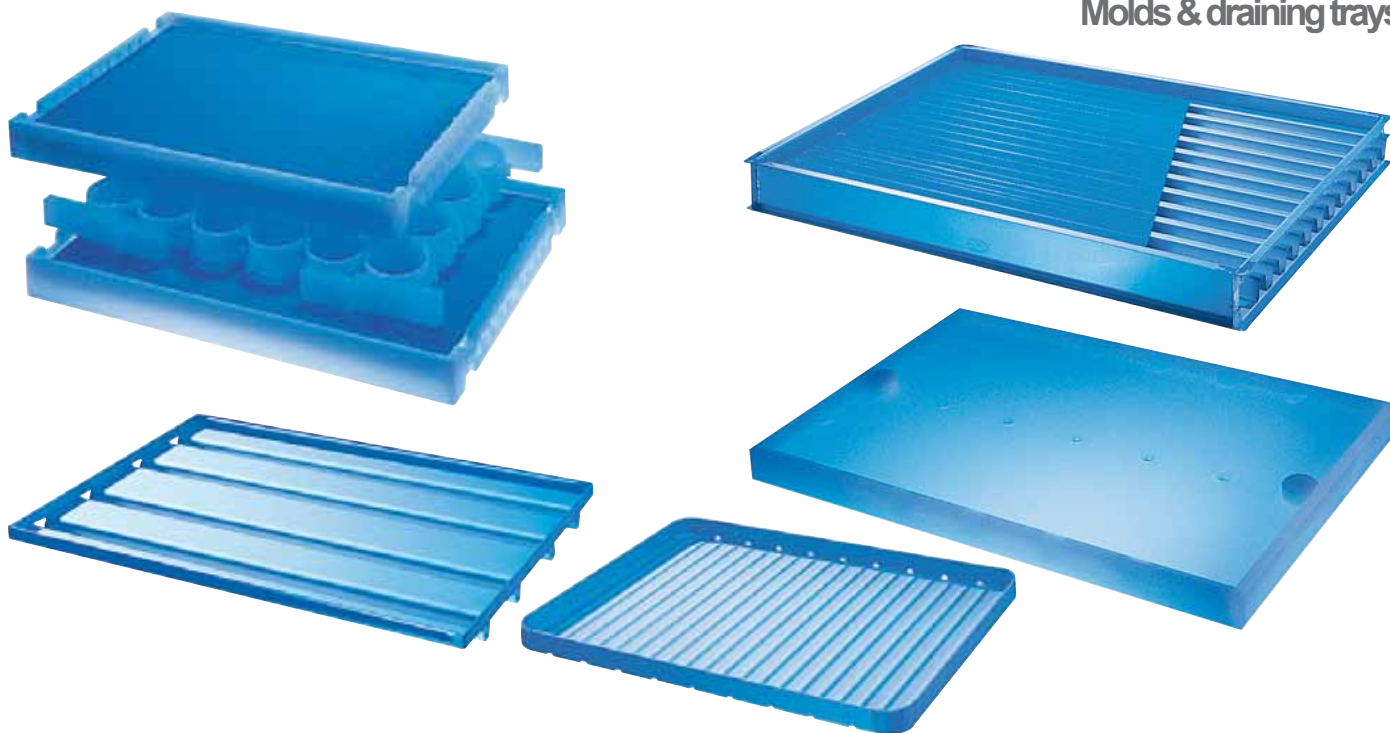

Reference	Type of trays	Material	Maximum useful dimensions and standards				Other dimensions	Brevet SERVI DORYL	Use under conditions
			mm	Inch	mm	Inch			
PLX/1	With 2 up to 4 whey draining gutters	Stainless steel 304 or 306 and Aluminium	600	23 19/32	995	39 5/32			
PLX/2			600	23 19/32	1100	43 9/32			
PLX/3	With flat base and no welded bended sides	Stainless steel 304 or 306	510	20 1/16	630	24 25/32	yes		
PLX/4	With flat base and welded bended sides	Aluminium 1050 H24 ou 5754 H111	510	20 1/16	630	24 25/32	yes		
PLX/5	Double face	Stainless steel 304 to 316	550	21 5/8	1000	39 11/32			
PLX/6	Separated double face tray	Polypropylen	Depending on moulds grouping						
PLX/7	Double face tray	Polypropylen	Depending on moulds grouping					patented anti-drop system	
PLX/8	Double face tray	Polypropylen	469	18 7/16	718,5	28 9/32	yes	patented anti-drop system	
PLX/9			469	18 7/16	958	37 11/16			
PLX/10	Double face multimoulds draining tray with sloping gutters	Polypropylen	500	19 21/32	622	24 15/32	On request	patented whey draining and cheese ventilation system	
PLX/11			500	19 21/32	652	25 21/32			

0* : seperated bottom

You have not found the model you are looking for, we certainly have a solution for you.

Feel free to contact us : Tel +33 (0)2 47 96 11 50 – Fax +33 (0)2 47 96 11 77