EGLI AG WILERSTRASSE 7 CH-9606 BÜTSCHWIL SWITZERLAND TEL.+41 71 982 88 00 FAX +41 71 982 88 01 INTERNET www.egliag.com E-MAIL info@egliag.com




FASA ARM



Machine type Output¹, bricks/min Output control Dosing range², g Batch Wrapping material Roll external diameter, mm Roll width, mm Roll bushing diameter, mm Thickness, mm Weight of parchment paper, g/m² Rated power input³, kW Voltage, V Frequency, Hz

rotary 20 - 80 step-less 9 - 1000 volumetric aluminum foil laminates, parchment paper up to 400 85 - 275 70 0,05-0,08 55±5% 1,5 - 2,2 220/380 50 - 60

Dimensions , mm

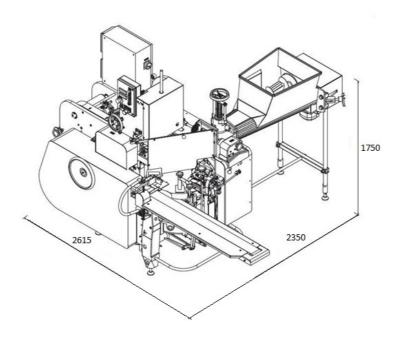



Additional ARM Options:

Safety Cover for
the machine

Butter filling and wrapping machine will have a stainless steel frame and polycarbonate panels to cover the main body of the machine excluding the hopper.

The frame has a locking system – when the machine is running, the doors are locked automatically. Only when machine is stopped the doors can be opened.





Automatic Lubrication System

The system will have a central SKF oil feeding station with tubes to 25 oiling points of the machine. 5 points will stay manual due to their location.



PLC screen

Siemens PLC touch screen control available instead of Enda potentiometer.



EGLI AG WILERSTRASSE 7 CH-9606 BÜTSCHWIL SWITZERLAND TEL.+41 71 982 88 00 FAX +41 71 982 88 01 INTERNET www.egliag.com E-MAIL info@egliag.com



Stainless steel inserts for windows in the table

All windows in the table where packing function is performed will have stainless steel inserts for the walls with plastic bottoms.



Hopper protection sensor

Once the protection bar around the hopper is pushed down, it automatically stops the augers.



Hopper cover

Polycarbonate cover of hopper used during running of machine for hygiene and protection.



Packaging material disinfection lamp

UV lamp disinfects the packaging material before filling.



EGLI AG WILERSTRASSE 7 CH-9606 BÜTSCHWIL SWITZERLAND TEL.+41 71 982 88 00 FAX +41 71 982 88 01 INTERNET www.egliag.com E-MAIL info@egliag.com



Cold embossing dating device

Cold embossing dating device available (no color) only for aluminum foil (not for parchment paper).

One line 8 digits in the form of YYYY MM DD



Not suitable for 10-25g portions.

Thermo printer

Impress thermo printer available. Up to 3 lines, up to 12 symbols in one line.



2014.02.15

Inkjet printer

Zanasi Z5000 inkjet printer available (Italy).

